



No Utility Bills Inc.

www.noutilitybills.com

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!



Kodiak Flat Top Wood Stove Line



Available Finish Options



Model #	Kodiak 1200 Flat Top	Kodiak 1700 Flat Top
List Price From *		
Sale Price From *		
Heating capacity	800 sq. ft. to 2,200 sq. ft.	1000 sq. ft. to 3,000 sq. ft.
Firebox volume	1.85 cu. ft.	2.5 cu. ft.
Burn Time	6 to 10 hours	8 to 12 hours
Maximum Heat Output BTU/hr., Seasoned Cord Wood	67,000	74,000
Efficiency	82.6%	84.7%
EPA Rating	3.3 grams per hour	4.5 grams per hour
Exterior dimensions	28.25" H x 25" W x 22.5" D	28.25" H x 25" W x 27" D
Actual weight	280 lbs	320 lbs
Flue Collar	6"	6"
Maximum log length	18" N/S	20" N/S
Door Viewing Area	177 Square Inches	
Cast Door Options	Brushed Nickel, Nickel, 24kt Gold Plated, Black or Black With Gold or Nickel Trim	
Pedestal with ash pan	Available	Available
Cast legs with ash pan	Available	Available
Mobile home approved	Yes	Yes
Options		
Heat Efficiency Shield	Optional	Optional
Adapter for fresh air kit	Optional	Optional
Optional convection fan	135 cfm	135 cfm
Minimum Rear Clearance	10" DWSP / 8" DWSP & FTHES	10" DWSP / 7" DWSP & FTHES
Min Rear Clearance TV / OBW	12" DWSP	13" DWSP
Floor Protection	Non-combustible	Non-combustible
*Minimum Chimney	12 Feet @ Sea Level	12 Feet @ Sea Level



No Utility Bills Inc.

www.noutilitybills.com

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!



Kodiak Step Top Wood Stove Line



Leg Ash Pan System





Pedestal Ash Pan System




Model #	Kodiak 1200 Step Top	Kodiak 1700 Step Top	Kodiak 2100 Step Top
List Price From *			
Sale Price From *			
Heating capacity	800 sq. ft. to 2,200 sq. ft.	1000 sq. ft. to 3,000 sq. ft.	1200 sq. ft. to 3,000 + sq. ft.
Firebox volume	1.85 cu. ft.	2.5 cu. ft.	3.1 cu. ft.
Burn Time	6 to 10 hours	8 to 12 hours	8 to 12 hours
Maximum Heat Output BTU/hr., Seasoned Cord Wood	67,000	74,000	82,000
Efficiency	82.6%	84.7%	75%
EPA Rating	3.3 grams per hour	4.48 grams per hour	2.9 grams per hour
Exterior dimensions	31.25" H x 25" W x 22.5" D	31.25" H x 25" W x 27" D	32.25" H x 25" W x 28" D
Actual weight	280 lbs	310 lbs	480 lbs
Flue Collar	6"	6"	6"
Maximum log length	18" N/S	20" N/S	22-1/2" N/S
Door Viewing Area	177 Square Inches		
Cast Door Options	Brushed Nickel, Nickel, 24kt Gold Plated, Black or Black With Gold or Nickel Trim		
Pedestal with ash pan	Available	Available	Available
Cast legs with ash pan	Available	Available	N/A
Mobile home approved	Yes	Yes	No
Options			
Adapter for fresh air kit	Optional	Optional	Optional
Optional convection fan	Variable Speed 135 cfm	Variable Speed 135 cfm	Variable Speed 135 cfm
Minimum Rear Clearance	10" DWSP	10" DWSP	12" SWSP *No DWSP Specs
Min Rear Clearance TV / OBW	12" DWSP	13" DWSP	*Not Specified
Floor Protection	Non-combustible	Non-combustible	Non-combustible
*Minimum Chimney	12 Feet @ Sea Level	12 Feet @ Sea Level	12 Feet @ Sea Level

Long Burn Times - Progressive Burn Technology is designed to keep hot embers in the firebox after a night's burning. This process is achieved by restricting the air in the back of the firebox, leaving hot embers for you to start up your wood stove again.

Clean Burning - Secondary air tubes add super-heated air to the fire as the burn progresses to the front. This maintains efficiencies and keeps emissions low.

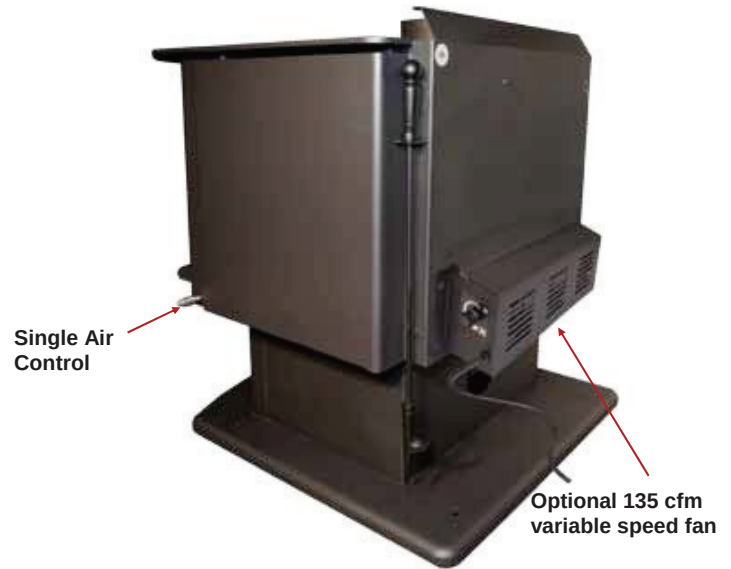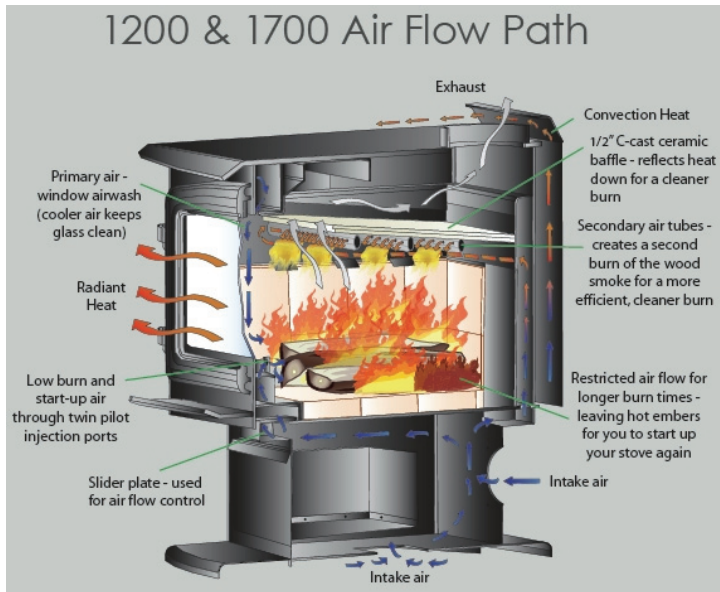

Durable C-Cast Ceramic Baffle Material

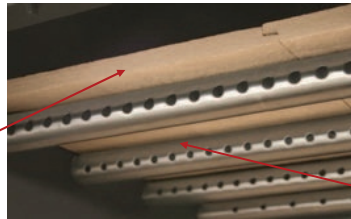

Heavy-duty Stainless Steel Secondary Air Tubes


1200 & 1700 Performance Features:

- large firebox capacity for long overnight burns
- single, easy-to-use air control adjusts the heat output and regulates the fire
- twin pilot injection ports tuned to deliver a fast start-up. These injection ports are 3" above the firebox floor so you can build a good deep ember bed and not affect low burn or start up.
- heavy-duty 304 grade stainless steel secondary air tubes for clean burns
- ultra strong air wash helps to keep the glass clean
- radiant heat is maximized through the large glass area (177 sq. in.)
- up to 18" log length loaded north/south on a 1200 firebox & 20" loaded north/south on a 1700 firebox



2100 Enviro Wood Stove Features:

- up to 5/16" thick steel construction
- 1/2" diameter hinges and door handle
- standard cast iron ash plug and large ash pan
- fully lined brick firebox
- secondary air system for maximum efficiency
- Up to 22.5" log length loaded North/South

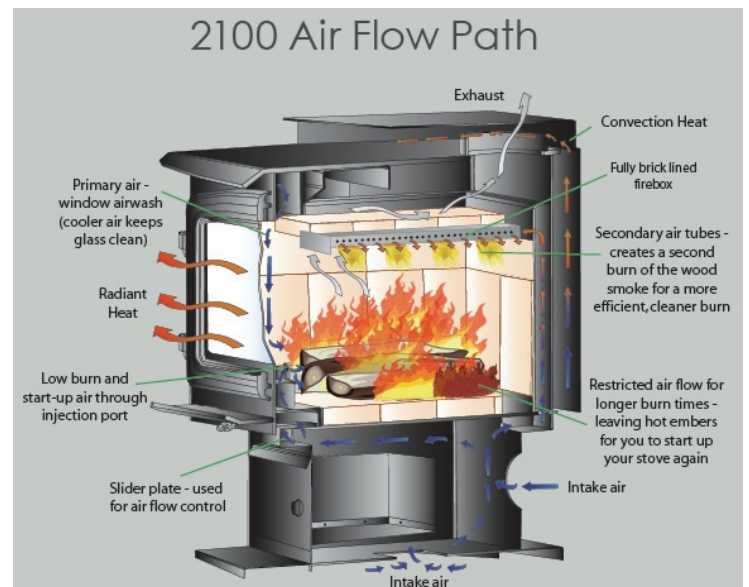

Build A Stove With A Look - As Individual As You Are

Choose from the flat top or step top body style,
a cast iron door in brushed nickel, gold, nickel, black or black with gold or nickel trim,
finally your choice of a pedestal base with standard ash pan or
cast iron legs in black, brushed nickel, gold or nickel with standard ash pan.



Available Finish Options



Optional 130 cfm
variable speed fan



Leg Ash Pan System



Pedestal Ash Pan

