

No Utility Bills Inc.

www.noutilitybills.com

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada
VIEWINGS BY APPOINTMENT ONLY!

HeatMaster SS MFe Series Outdoor Boilers



MFe Series Features Include:

Constructed with Titanium- Enhanced 409 Stainless Steel
(to hold up longer against wear, tear and corrosion)

Easy Access Rear Door

Rocker Grates and Ash Pan

Easy-Access Hinged Rear Door

Heavy Duty Multi-layer Insulated

Timer keeps the coal bed alive during idle


Safe Easy-To-Use Dual Firebox Door Latch

Deep Oval Firebox Design Allows For More Efficient Heat Transfer
(extra strength and fewer welds with no corners for ash to collect in)

Triple pass exhaust allows maximum heat transfer into the water jacket.

CSA/UL Certified

Lifetime Limited Workmanship and Corrosion Warranty.

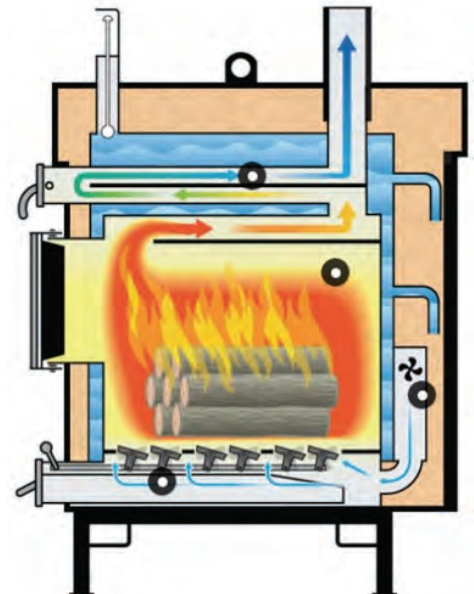

SPECIFICATIONS	MF3000E	MF5000E	MF7000E	MF10000E	MF20000E
List Price Less Freight					
Sale Price Less Freight					
Estimated F.O.B. NUB Yard					
Length	52"	56"	69"	81"	98"
Width	36"	49"	49"	51"	82"
Height	78"	84"	89"	93"	100"
Insulated Chimney	6"	6"	6"	8"	10"
Firebox Door (W" x H")	16" X 18"	20" X 20"	24" X 24"	24" X 24"	42" X 30"
Approx. Weight	+/- 950 LB	+/- 1300 LB	+/- 1500 LB	+/- 2000 LB	+/- 4000 LB
Approx. Water Capacity	60 US Gal	125 US Gal	180 US Gal	230 US Gal	555 US Gal
Max Wood Length	28"	34"	46"	56"	60"
Firebox (W" x L" x H")	24 x 28 x 32	31 x 34 x 38	34 x 46 x 40	34 x 56 x 42	52 x 60 x 52
Supply & Return Connections	1 - Each - 1"	2 - Each - 1"		2 - Each - 1-1/2"	4 - Each - 1-1/2"
Approx. Maximum Btu's	150,000	250,000	375,000	500,000	800,000

Btu's varies according to fuel type, quality and moisture content.
Delivery, Installation Materials and Installation Labor Are Not Included!
These Services Can Be Provided For An Additional Cost.
All specifications are subject to change and / or corrections without notice.!

No Utility Bills Inc.

www.noutilitybills.com

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada
VIEWINGS BY APPOINTMENT ONLY!



Safety Door Latch

Our carefully designed latch catches the door so it doesn't swing open and expose the user to excessive heat.

Easy View Water Level Gauge



See the water level easily, even from a distance.



Hinged Rear Door

The insulated rear door allows for quick and convenient access to the back of the unit. It can be easily removed if desired.



The Deep Oval Firebox

Allows for more efficient heat transfer, extra strength and fewer welds with no corners for ash to collect in. The extra deep firebox allows more fuel per load and keeps the door cooler.



Control Panel

Easy to use digital control and switches.




The Easy Clean Ash Pan

Removable ash pan makes ash clean up quick and easy.



Forced Air Fan

Forces air through the bottom of the firebox, ideal for fast heat recovery.

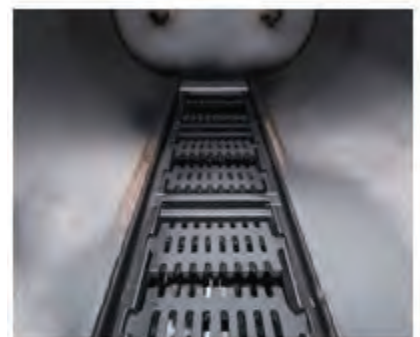

Shaker Grates

Heavy cast iron grates make firebox cleaning simple.