



No Utility Bills Inc.

www.noutilitybills.com

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!

List Price From	
List Price As Displayed	
Sale Price From	
Prices are subject to change without notice! 071908	

The Harman Oakwood Wood Stove




*** Shown with optional warming racks ***

Fuel	Wood
BTU Range	11,000 to 42,000
Heating Capacity*	Up to 2,000 Square Feet
Firebox Capacity	2.46 cu.ft.
Log Length	21" maximum
Burn Time*	Up to 17 hours
Average Emissions	2.32 Grams per hour
Emissions on Low	.8 grams per hour
Flue Size	6" Top or Rear Vent
*Minimum Chimney	16' Feet @ Sea Level
Depth	24.9 inches
Height	29 inches
Width	28-1/4 inches
Outside Air Size	3 inches (optional)
Weight	480 lbs
Mobile Home Approved	No
Floor Protection	*Non-combustible* W/BHS
Rear Clearance	13" *Minimum* W/DWSP/RHS
Testing	CAN/ULC-S627, EPA (Phase II)

Harman's special FireDome Non-Catalytic Combustion System is used for clean burning and even heat output. What this equates to is unvarying heat throughout your home over a longer period of time without the peaks and valleys of other wood stoves. The FireDome attains Harman's reputation of high efficiency while saving you the expense associated with catalytic stoves.

Top loading makes adding wood easier and allows the Oakwood to hold more wood than other stoves of the same size. The Oakwood can hold over 40 pounds of cordwood on a 3 inch charcoal bed which makes burn times of 12 to 16 hours a reality.

Typical Low Burn Rate Patterns for Three Basic Types of Wood-Burning Stoves

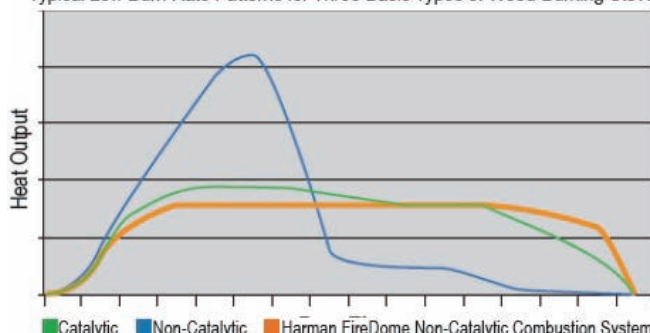

The Oakwood's optional cooking grill allows you to grill your favorite meats and vegetables without altering your home's air quality. This stainless steel grill is easy to remove and clean.



No Utility Bills Inc.


www.noutilitybills.com

Tel: (780)628-4835



#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!

The Harman Oakwood Wood Stove

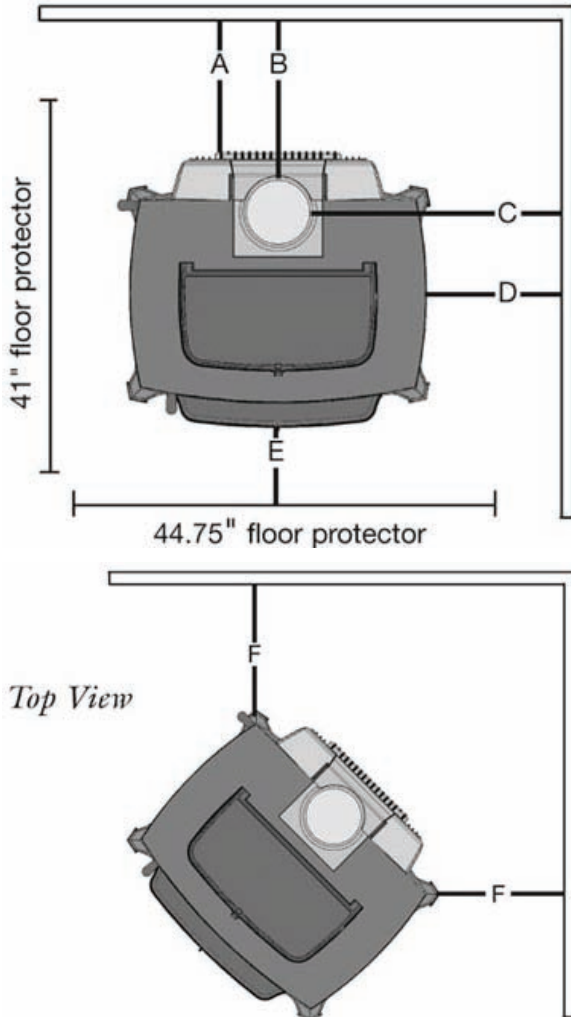

*Top View
(of Top Vent)*

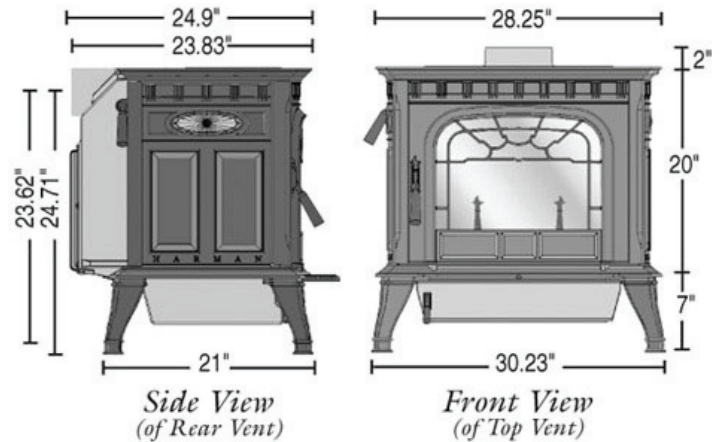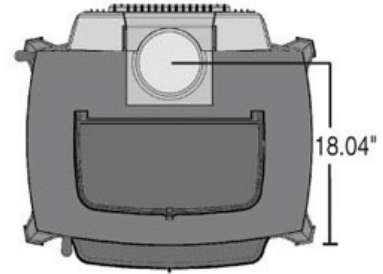

*Side View
(of Rear Vent)*

*Front View
(of Top Vent)*

	Single Wall Pipe				Double Wall Pipe	
	With Shield		Without Shield		With Shield	
	Top Vent	Rear Vent	Top Vent	Rear Vent	Top Vent	Rear Vent
A	19"	14"	28"	28"	13"	10"
B	23"	N/A	32"	N/A	17"	N/A
C	38"	N/A	38"	N/A	34"	N/A
D	26"	22"	26"	26"	22"	22"
E	16"	16"	16"	16"	16"	16"
F	22"	16"	24"	24"	19"	16"

See owner's manual for additional clearances.

